



PHOTOVOLTAIC MODULE AS-M3607-S (G1 CELLS)



380- 395 Wp 360 SHINGLED CELLS

AEG solar modules combine the most advanced technology with high reliability in manufacture to offer you a product meant for high achievements.



SHINGLE TECHNOLOGY FOR MAXIMUM EFFICIENCY

The shingle technology used in AEG solar modules covers larger portions of the module with cells, eliminating the need for interconnecting ribbons and reducing resistive losses. This in turns maximizes power output and module efficiency



EXTENSIVE WARRANTIES, EXTRA PEACE OF MIND

Thanks to their outstanding manufacturing quality, AEG High Efficiency modules are covered by 15 years warranty on the product and 25 years warranty on performance. For extra peace of mind, product warranty can optionally be extended to 20 years.

COMPREHENSIVELY CERTIFIED

AEG solar modules and production facilities are compliant with the the latest standards to guarantee safety and reliability. Production facilities are certified according to ISO 9001, ISO 14001 and OHSAS 18001. AEG solar products are certified among others by:



www.aeg-industrialsolar.de

HIGH EFFICIENCY SERIES



PRODUCT NAMECODE (PNC)

AS-M3607-S(G1)-380/385/390/395/HV (silver frame)
AS-M3607Z-S(G1)-380/385/390/395/HV
(black frame)

PRODUCT SERIES & NAMECODE (PNC)

AEG HIGH EFFICIENCY SERIES

AS-M3607-S(G1)-380/385/390/395/HV (silver frame)

AS-M3607Z-S(G1)-380/385/390/395/HV (black frame)

ELECTRICAL CHARACTERISTICS AT STC^{1,2}

Nominal Power (Pmax)	[Wp]	380	385	390	395
Power Sorting ³	[Wp]	-0/+5	-0/+5	-0/+5	-0/+5
Maximum Power Voltage (Vmp)	[V]	40.6	40.8	40.8	40.9
Maximum Power Current (Imp)	[A]	9.36	9.44	9.56	9.66
Open Circuit Voltage (Voc)	[V]	49.1	49.3	49.3	49.4
Short Circuit Current (Isc)	[A]	9.93	9.98	10.03	10.07
Module Efficiency (η_m)	[%]	20.3	20.5	20.8	21.1
Maximum System Voltage	[V]	1500	1500	1500	1500
Series Fuse Maximum Rating	[A]	20	20	20	20

ELECTRICAL CHARACTERISTICS AT NMOT⁴

Maximum Power (Pmax)	[W]	286	290	294	297
Maximum Power Voltage (Vmp)	[V]	38.7	38.9	38.9	39
Maximum Power Current (Imp)	[A]	7.39	7.45	7.55	7.63
Open Circuit Voltage (Voc)	[V]	46.8	47.0	47.0	47.1
Short Circuit Current (Isc)	[A]	8.00	8.04	8.08	8.11


MECHANICAL CHARACTERISTICS

Solar cells	monocrystalline [pcs]	360
	Dimensions [mm]	5 shingles based on G1 cells
Front glass	high-transparency	Transparent
	Thickness [mm] / [in]	3.2 / 0.125
Backsheet	White	
Encapsulant	EVA	Transparent
Frame	Anodized aluminum alloy	Silver or black
Junction box	Standard	IP68
	Bypass diodes	2
UV-resistant cables	Length [mm] / [in]	1200 / 47.24
	Section [mm ²]	4
Connectors	MC4	compatible
Dimensions	H x L x W [mm]	1646 x 1140 x 30
	H x L x W [in]	64.80 x 44.88 x 1.18
Weight	[kg] / [lbs]	19 / 41.88
Maximum load	Wind / Snow [Pa]	2400 / 5400

CERTIFICATIONS

System	ISO 9001, ISO 14001, ISO45001
Product	IEC/EN 61215-1:2016; IEC/EN 61215-1-1:2016; IEC 61215-2:2016; EN 61215-2:2017+AC:2017 + AC2018; IEC 61730-1:2016 / EN IEC 61730-2:2018+AC2018; IEC 61730-2:2016 / EN IEC 61730-2:2018+AC2018


TECHNICAL DRAWINGS

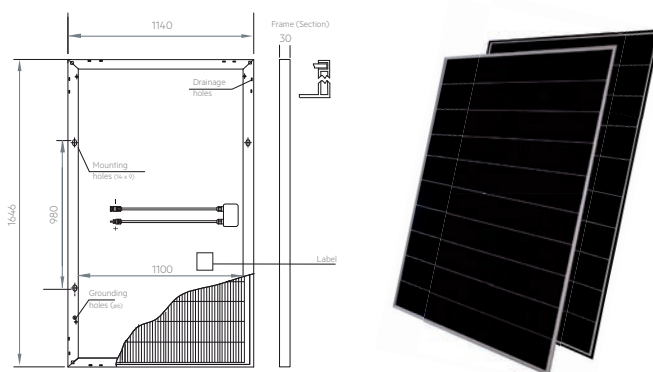

TEMPERATURE CHARACTERISTICS

NMOT	[°C]	42.3
Pmax Temp. Coefficient (γ)	[%/°C]	-0.34
Voc Temp. Coefficient (β)	[%/°C]	-0.27
Isc Temp. Coefficient (α)	[%/°C]	0.04
Operating temperature	[°C]	-40~+85

I/V CURVES - IRRADIANCES

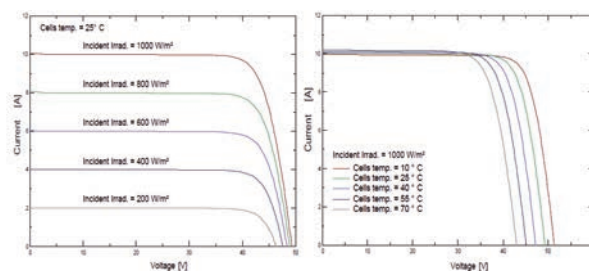

WARRANTIES

Product warranty	[years]	15 (opt. ext. to 20)
Performance warranty (linear) ⁵	[years]	25

PACKAGING

Packing configuration	[pcs/pallet]	36
Loading capacity	[pcs/40 ft container]	1008

CONTACT US

Solar Solutions GmbH

Brückenstrasse 94, 60594 Frankfurt am Main, Germany

+49 (0)69 400500810 | info@aeg-industrialsolar.de

www.aeg-industrialsolar.de

1-Standard Test Conditions (STC): Irradiance 1000 W/m², Air Mass AM = 1.5, Cell Temperature 25°C

2-Measurement tolerances (IEC 61215:2016): Pmax±3%, Voc±3%, Isc±3%

3-AEG photovoltaic modules are classified according to a principle of positive power tolerance: the Power Output measured at STC of the delivered modules exceeds their assigned Nameplate Nominal Power

4-NMOT: Nominal operating temperature of module, Irradiance 800 W/m², Wind Speed 1m/s, Ambient Temperature 20°C, Air Mass AM=1.5

5-(HE/GB)No less than 98% of the minimum "Peak Power at STC" in the first year, power output decline no more than 0.55% per year thereafter. Full text of the Warranty Terms available at: www.aeg-industrialsolar.de

6-Dimensions in the technical picture are expressed in mm with tolerance ±2 mm (+0.079 °) Version 2021.08.V2.EN

© Solar Solutions GmbH. Specifications in this datasheet are subject to change without notice.

AEG is a registered trademark used under license from AB Electrolux (publ).